

SMART POWER™

Power Supply

The SmartPower™ family of power supplies features dependable current and voltage output. A variety of wattages is available to fit your application space and system requirements.

The power supplies are compatible with the majority of color scrollers, gobo rotators and other accessory devices. The SmartPower™ units are proudly built in the USA and tested against strict standards to ensure trouble-free installation and smooth operation.

The SmartPower™ portfolio offers affordable, versatile, dependable power to meet your needs.



Features

- Auto sensing AC input voltage range, 100-240 volts, 50/60 Hz.
- Auto switching for international AC line voltages.
- User accessible fuse on back panel. Spare fuse included.
- Self-healing circuit protection.
- Output overload protection shuts individual circuit off if cable short or load fault occurs.
- Automatic output recovery when cable short or load fault is removed.

Compatible Equipment


Power Needs

AC Lighting Chroma Q Broadway	22 watts
AC Lighting Chroma Q M1, 2, 5, 8	36 watts
Apollo EZ Iris	14.5 watts
Apollo MXR 2 Scroller	43 watts
Apollo Smart Color® Pro Scroller	26 watts
Apollo Smart Move® DMX Scroller	14.5 watts
Apollo Smart Move® JR. DMX Scroller	14.5 watts
City Theatrical DMX Iris.....	8.5 watts
DHA Twin DMX.....	12 watts
Gam DMX Twin Spin	14.4 watts
Gam SX-4, 6 Gobo Tray	10.8 watts
Rainbow 6", 8", 12" Pro Colour Scroller	14 watts
Rainbow 15" Pro Colour Scroller	29 watts
Rosco I-Cue Mirror.....	17 watts
Rosco DMX Rotator	6 watts
Wybron Forerunner.....	14 watts

To determine capacity when mixing devices, add the power needs for each individual device.

Due to continuous improvement, specifications are subject to change without notice.

	Smart Power™ 75	Smart Power™ 200	Smart Power™ 400
Voltage Input	100-240 Volt AC Auto Switching	100-240 Volt AC Auto Switching	100-240 Volt AC Auto Switching
Hertz	50-60Hz	50-60Hz	50-60Hz
External Fuse	No	Yes	Yes
Watts Per Circuit Output	75 Watts	200 Watts x 1	200 Watts x 2
5-Pin DMX Input	Yes	Yes	Yes
DMX Pass Through	No	Yes	Yes
Output Circuit at 24 VDC	3.0 Amps	8.3 Amps Per Circuit	8.3 Amps Per Circuit x 2
XLR 4-Pin Output	1	2	4
XLR 4-Pin Return with DMX Terminator	No	2	4
Cooler	Air	Fan	Fan
Device Loops	0	2 (200W Max Per Circuit)	4 (200W Max Per Circuit)
Rack Mount Kit	No	No	Yes
Dimensions			
Height	7¼" (184.15mm)	4.75" (121mm)	4.75"(121mm)
Width	2¼" (57.15mm)	10.5" (267mm)	12.5" (318mm)
Depth	1¼" (31.75mm)	13.5" (343mm)	18.5" (470mm)
Weight	1.4 lbs. (.63kg)	7.0 lbs. (3.17kg)	14.8 lbs. (6.73kg)
Capacity			
Smart Color® Pro	2	7	14 (7 Per Circuit)
MXR 2	1	4	8 (4 Per Circuit)
Smart Move® DMX	4	13	26 (13 Per Circuit)
Smart Move® JR. DMX	4	13	26 (13 Per Circuit)
EZ Iris	4	13	26 (13 Per Circuit)
Certifications			
ETL or UL Listed	UL	UL	UL
Made in the USA	Yes	Yes	Yes

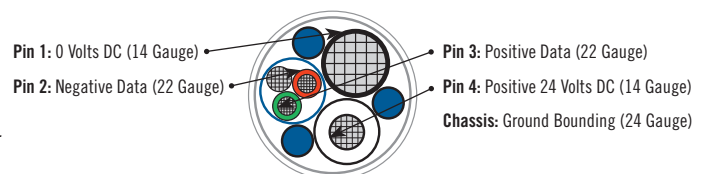

Apollo Design Technology, Inc.
 260.497.9191 • ApolloDesign.net
 7/17